



# Lyve Home Teardown

This guide is to help teardown the soon to be EOL Lyve Home Device. This is also in hopes someone could find a way to develop new software for it to keep it alive.

Written By: Adonis Sardinias



## Step 1 — Turn Lyve Home upside down



- Insert wisdom here.


## Step 2 — Remove rubber pad



- This should be easy to remove



### Step 3 — Remove 4x hex case screws

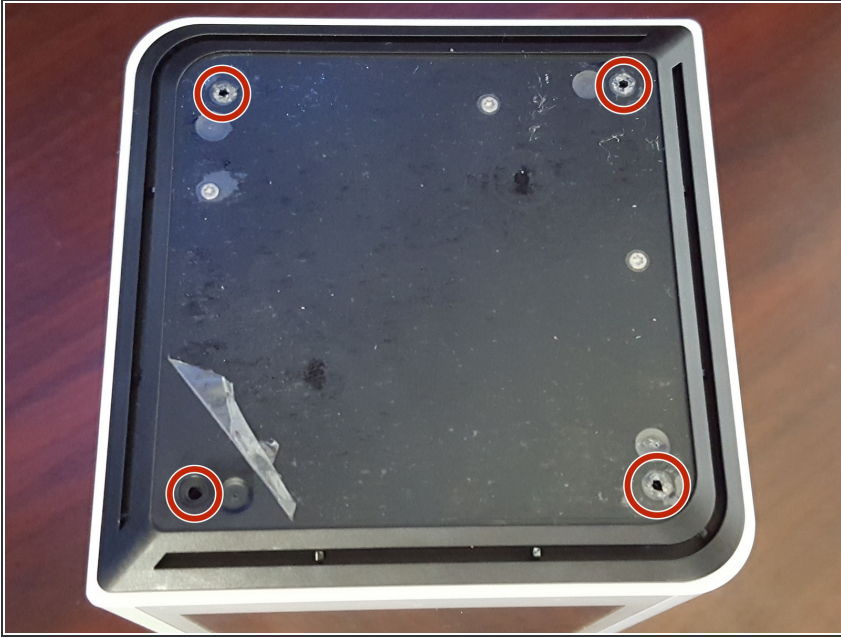



- In my case the sticky membrane that glues the rubber to the plastic stayed on the plastic.
- Remove the 4 hex screws that hold the bottom cover to the case

### Step 4 — Remove bottom cover






- Remove the bottom cover carefully. it should pop right out.

## Step 5 — Remove main board enclosure

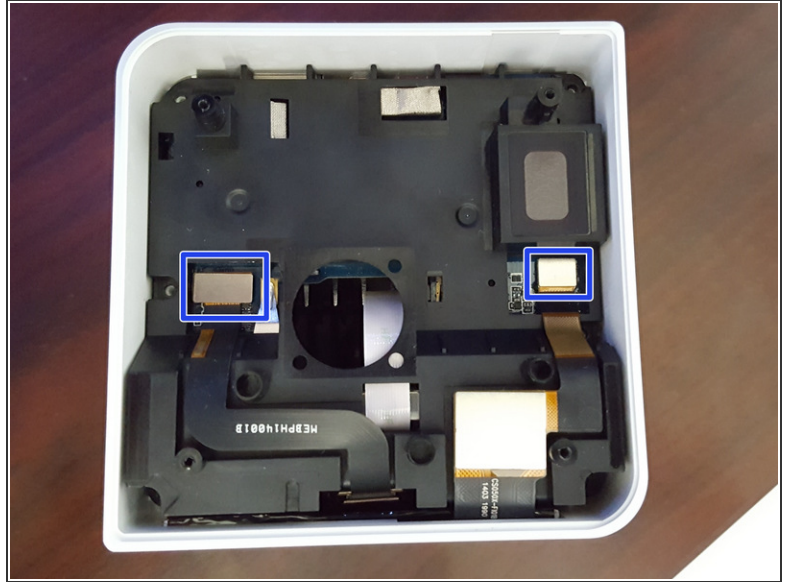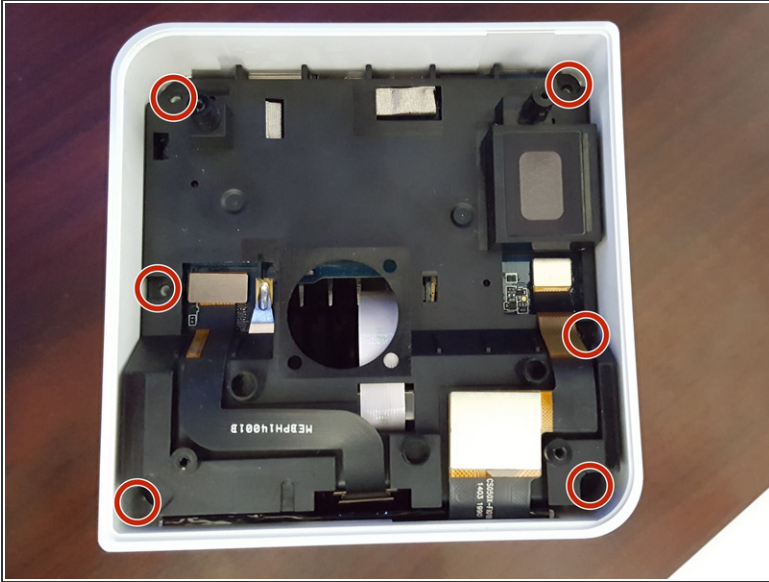

- Remove the 6 hex screws attaching the main board enclosure to case
- Remove connection ribbons that connect to the front LCD screen



## Step 6 — Remove Mainboard enclosure

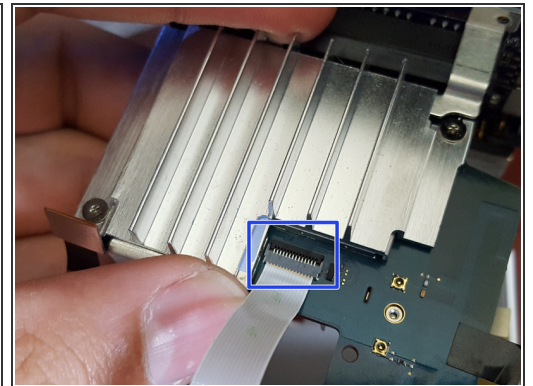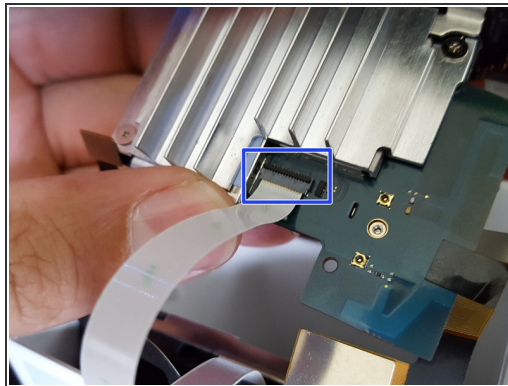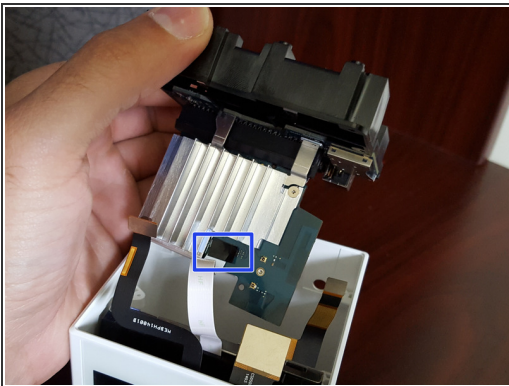

- Remove the mainboard enclosure from the case by placing your finger in the middle hole and removing it carefully from the case
- Remove the tape on top of the ribbon connector. this connects to the harddrive
- Unlock the connector by flipping the lock back to front. this flap is located closets to the heatsink
- pull the ribbon cable away from the mailboard





## Step 7 — Remove the harddrive

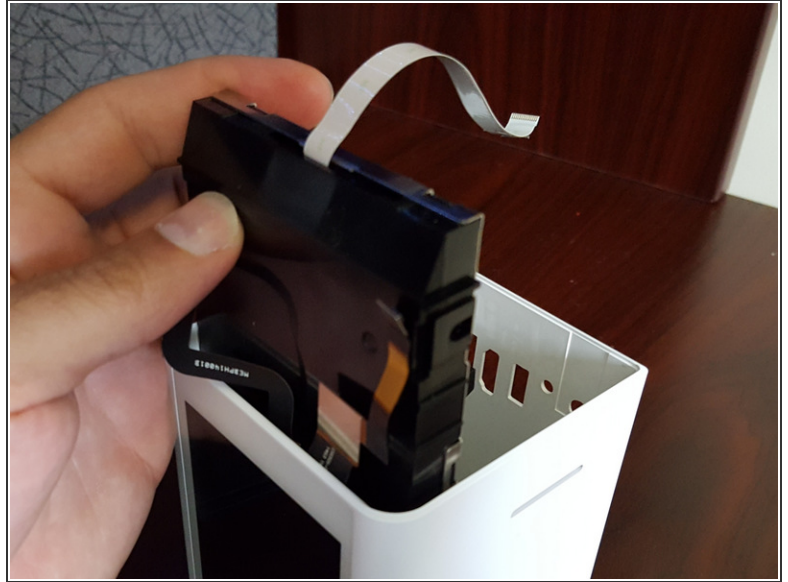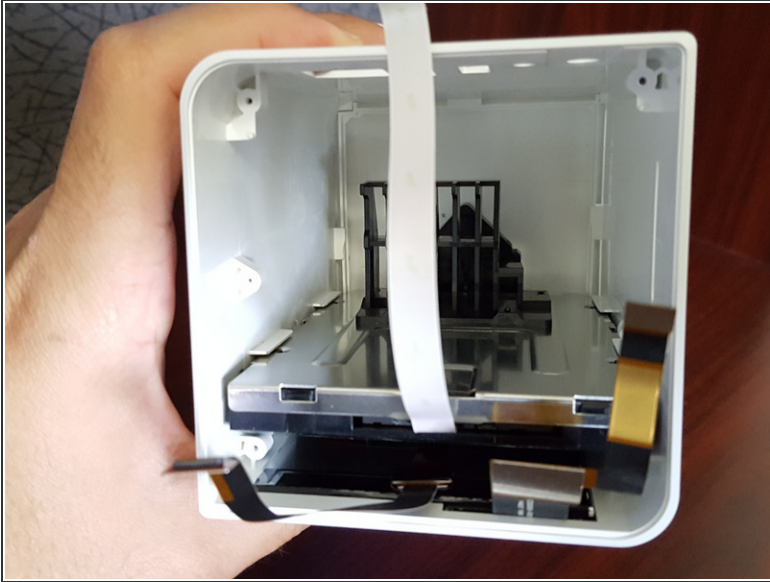

- Remove the hard drive by pulling it out


## Step 8 — Remove Main board enclosure

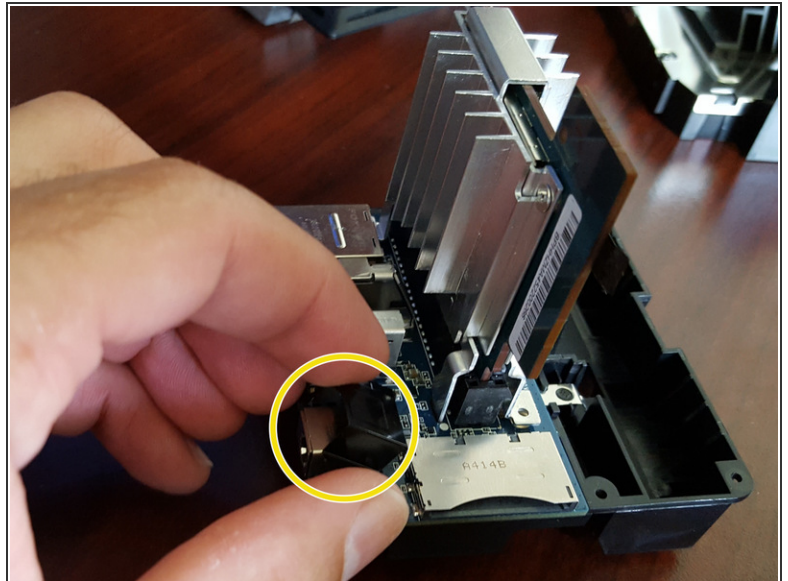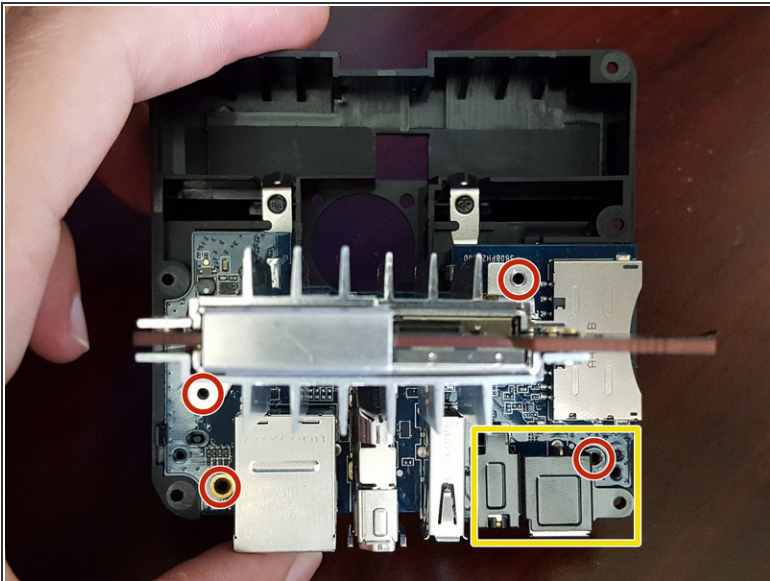

- Remove the 4 hex screws, 2x are holding the main board from the expansion board. 1x is holding the sound and power metal shield and 1 is left holding the expansion board from the enclosure.
- Remove metal audio/power shield
- Remove main board from the enclosure board.





## Step 9 — Remove Main board from Expansion Board

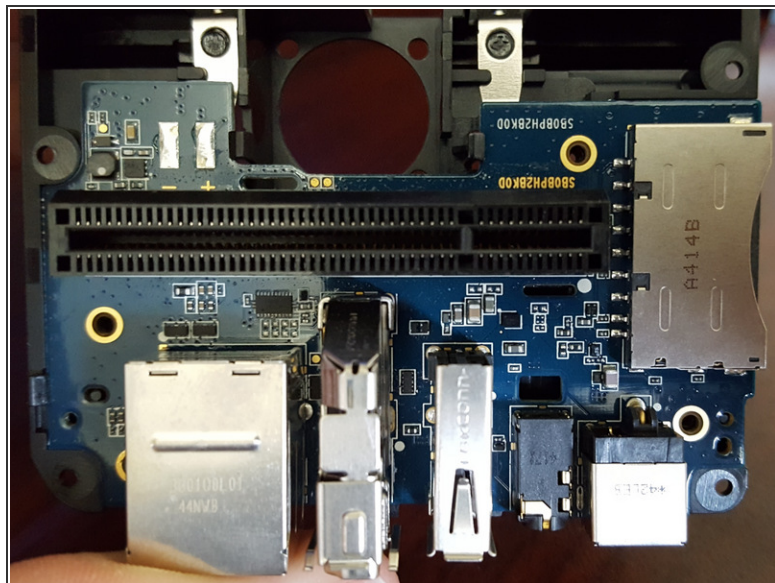

⚠ Remove the main board carefully away from the expansion board.

## Step 10 — Remove expansion board from enclosure

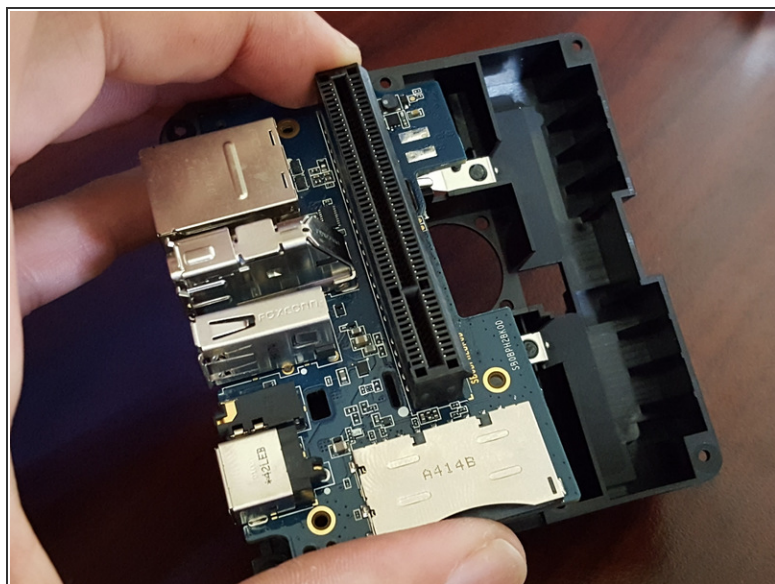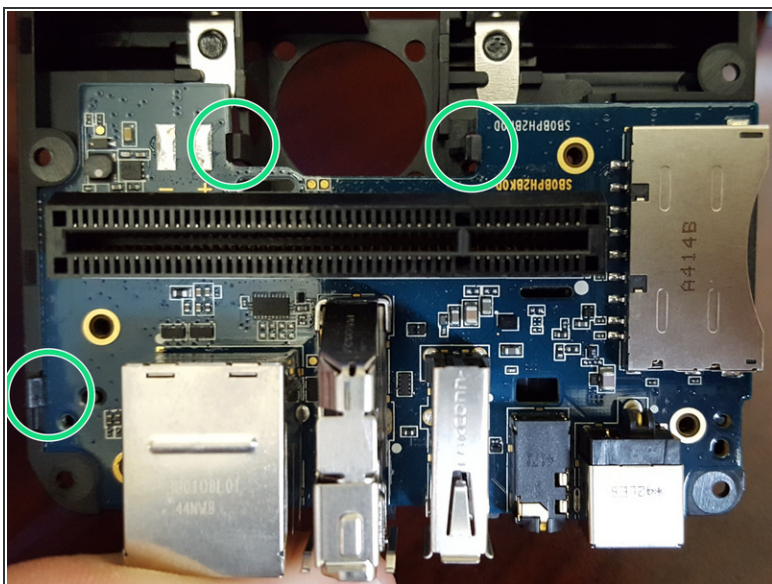


● Carefully remove the expansion board away from the enclosure but un clipping it.

ⓘ Its recommended to start from the side with the SD card slot.



## Step 11 — EXTRA - Board Pictures

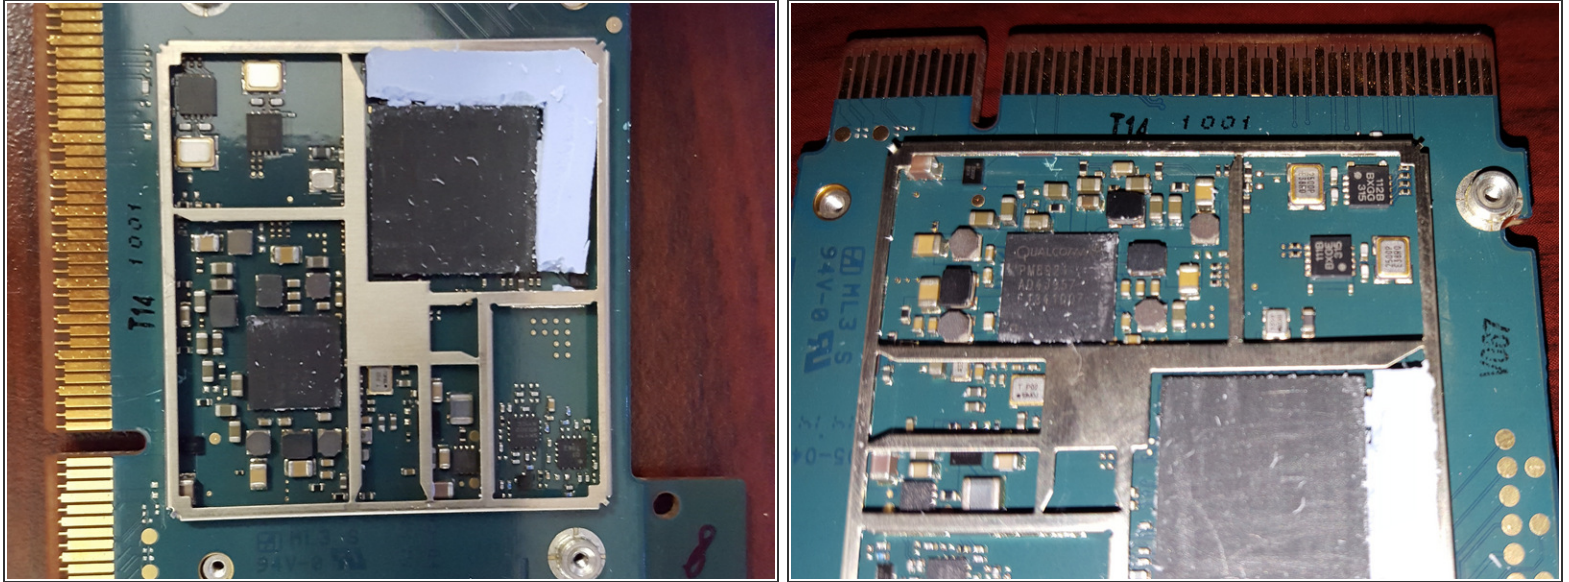

- These are pictures of the main board components under the shielding

**i** Qualcomm | PM8921 | AD4J957

## Step 12 — EXTRA - Board Pictures 2



- These are pictures of the main board components under the shielding

**i** Kingston eMMC 8GB | 240047-002,A00G | 1305 M30231710.10 | KE4CN3H5A

**i** Gigabit Ethernet | Atheros | AR8151

**i** Broadcom | BCM4339XXUBG

